

SSB-VI Kgs 50,100,200,300,500kg (Citation: GB/T7551-2008/ OIML R60 C3)

Cable Length=L:3m.....

Mode Of Connection: Red(Excitation+),Black(Excitation-),Green(Signal+),White(Signal-)...



The SSB is short for single-ended shear beam load Cell, which is designed for high accuracy platform scales Belt conveyor scales and a variety of process weighing applications.

--Heat-treated special Stainless steel construction for high accuracy corrosion resistance and good performance...


---Fully multilayer seal design to ensure compliance with IP66/67;

--High precision $\pm 0.02\%$ F.S

--Reliability super stability

--Easy installation

Dimensions

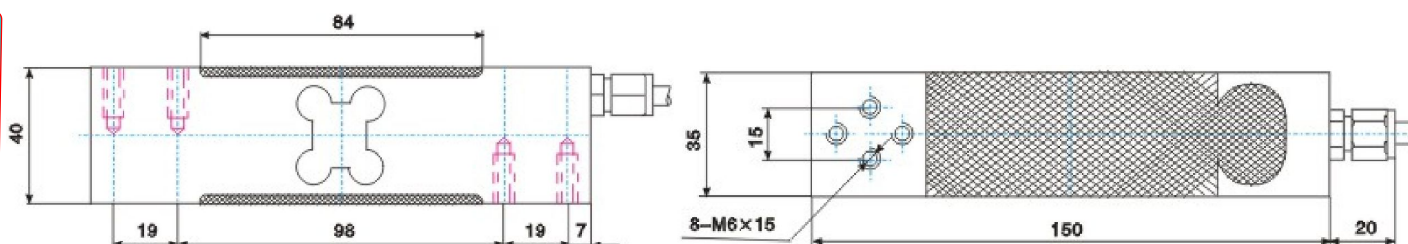

Technical Parameters

Capacity	50,100,200,300,500kg	Tco	<0.02% F.S/10°C
Sensitivity	2.0±0.002 mV/V	Tc Span	<0.02% F.S/10°C
Input Resistance	400±10 Ω	Operating Temp. Range	-30~+70°C
Output Resistance	350±5 Ω	Maximum Safe Over Load	150%F.S
Insulation Resistance	≥5000M Ω	Ultimate Over Load	300%F.S
Combined Error	±0.02% F.S	Recommend Excitation	10~12V DC
Creep Error (30min)	<0.02% F.S	Maximum Excitation	15V DC
Zero Balance	<1% F.S	The degree of protection	IP67

*Specifications are subject to change without notice.

Mar.2014